
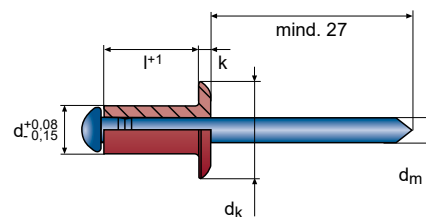


ALFO® Standard-Blindniet

Aluminium | Stahl verzinkt
Flachkopf | of en



2,0 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 7,8 mm EN AW-5754 [AlMg3]

d	l+1	$\frac{k}{d}$	Nr.	
2,4	3,0	0,5 - 1,0	10700024030	500
	4,0	0,5 - 2,0	10700024040	500
	6,0	1,5 - 4,0	10700024060	500
	8,0	3,5 - 6,0	10700024080	500
	10,0	6,0 - 8,0	10700024100	500
	12,0	8,0 - 10,0	10700024120	500

d_k 5,0^{-0,7} d_m 1,5 k 0,55^{±0,15} 2,5 mm 380 N 600 N

3,0	4,0	0,5 - 2,0	10700030040	500
	5,0	1,0 - 3,0	10700030050	500
	6,0	1,5 - 4,0	10700030060	500
	7,0	3,0 - 5,0	10700030070	500
	8,0	3,0 - 6,0	10700030080	500
	10,0	5,0 - 7,5	10700030100	500
	12,0	7,0 - 9,0	10700030120	500
	16,0	9,0 - 12,5	10700030160	500
	18,0	12,0 - 14,5	10700030180	500
	20,0	13,0 - 16,5	10700030200	500
25,0	16,0 - 21,5	10700030250	500	

d_k 6,3^{-0,7} d_m 1,7 k 0,8^{±0,2} 3,1 mm 740 N 1000 N

d	l+1	$\frac{k}{d}$	Nr.	
3,2	4,0	0,5 - 1,5	10700032040	500
	5,0	1,0 - 2,5	10700032050	500
	6,0	1,5 - 3,5	10700032060	500
	8,0	3,0 - 5,5	10700032080	500
	10,0	5,0 - 7,5	10700032100	500
	12,0	7,0 - 9,0	10700032120	500
	14,0	8,5 - 10,5	10700032140	500
	16,0	9,0 - 13,0	10700032160	500
	18,0	10,0 - 14,5	10700032180	500

d_k 6,5^{-0,7} d_m 1,9 k 0,8^{±0,2} 3,3 mm 750 N 1220 N

4,0	4,0	0,5 - 1,5	10700040040	500
	5,0	1,0 - 2,5	10700040050	500
	6,0	1,0 - 3,5	10700040060	500
	7,0	3,0 - 4,5	10700040070	500
	8,0	3,0 - 5,5	10700040080	500
	10,0	5,0 - 7,0	10700040100	500
	12,0	6,5 - 9,0	10700040120	500
	14,0	8,5 - 11,0	10700040140	500
	16,0	8,5 - 12,5	10700040160	500
	18,0	12,0 - 14,5	10700040180	500
	20,0	12,5 - 16,5	10700040200	500
	25,0	15,5 - 21,0	10700040250	500
	30,0	20,5 - 26,0	10700040300	500
	35,0	25,5 - 31,0	10700040350	500

d_k 8,0^{-1,0} d_m 2,0 k 1,0^{±0,3} 4,1 mm 1250 N 1800 N

