



# Einpressgewindebuchse offen V-SO4

Edelstahl 400er Serie

CAD  
DATEN  
ONLINE

Serie  
**487**

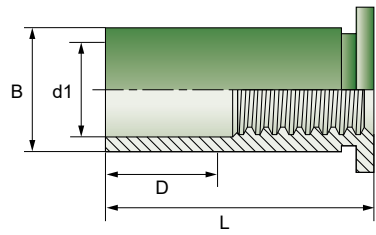

Einpressgewindebuchsen aus nicht rostendem Stahl (AISI 400er Serie), geeignet für die Verarbeitung in Blechen mit Härten über HRB 80 (bis 88).

M	min.	L	D	d1	B	H	Mindest- abstand Lochmittel Blechrand	Nr.				
<b>M3</b>	1,02	3,00	± 0,25	± 0,13	- 0,13	4,22	6,00	10487030003				
		4,00						0,00	10487030004			
		6,00							10487030006			
		8,00							10487030008			
		10,00						4,00	3,20	4,20	4,80	10487030010
		12,00							10487030012			
		14,00						8,00	10487030014			
		16,00							10487030016			
		18,00							10487030018			
		10487035003										
<b>3,5M3</b>	1,02	3,00	± 0,25	± 0,13	- 0,13	5,41	7,10	10487035003				
		4,00						0,00	10487035004			
		6,00							10487035006			
		8,00							10487035008			
		10,00						4,00	3,20	5,39	6,40	10487035010
		12,00							10487035012			
		14,00						8,00	10487035014			
		16,00							10487035016			
		18,00							10487035018			
		10487050004										

M	min.	L	D	d1	B	H	Mindest- abstand Lochmittel Blechrand	Nr.				
<b>M4</b>	1,27	4,00	± 0,25	± 0,13	- 0,13	7,14	8,40	10487040004				
		6,00						0,00	10487040006			
		8,00							10487040008			
		10,00						4,00	10487040010			
		12,00							10487040012			
		14,00							4,80	7,12	7,90	10487040014
		16,00							8,00	10487040016		
		18,00						10487040018				
		20,00						11,00	10487040020			
		22,00							10487040022			
25,00	10487040025											
<b>M5</b>	1,27	4,00	± 0,25	± 0,13	- 0,13	7,14	8,40	10487050004				
		6,00						0,00	10487050006			
		8,00							10487050008			
		10,00						4,00	10487050010			
		12,00							10487050012			
		14,00							5,35	7,12	7,90	10487050014
		16,00							8,00	10487050016		
		18,00						10487050018				
		20,00						11,00	10487050020			
		22,00							10487050022			
25,00	10487050025											

Buchsen mit Gewinde 3,5M3 bieten eine größere Wanddicke für die Gewindegröße M3.